IF IN DOUBT, ASK

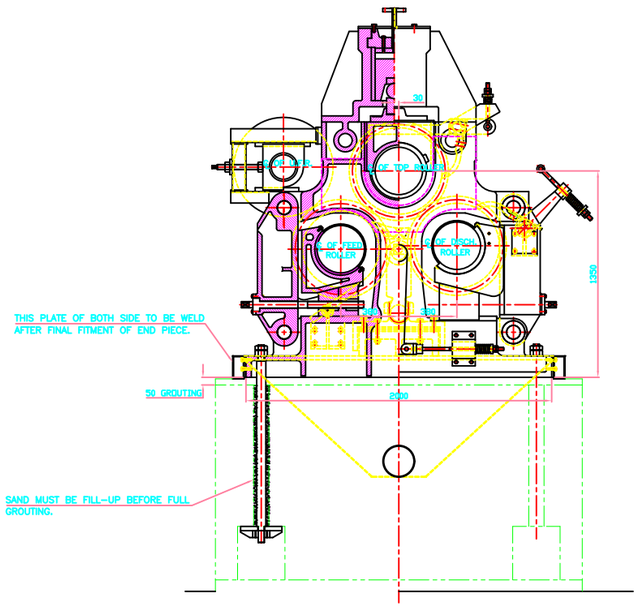

SECTION-AA

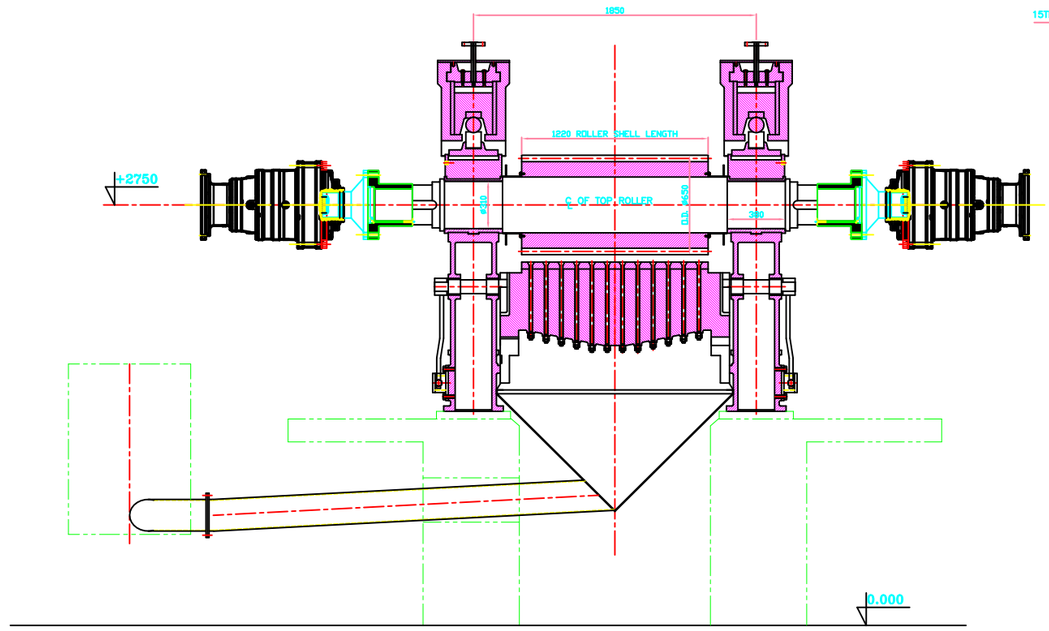

SECTION-BB

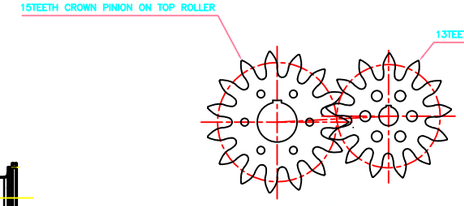

VIEW-Z

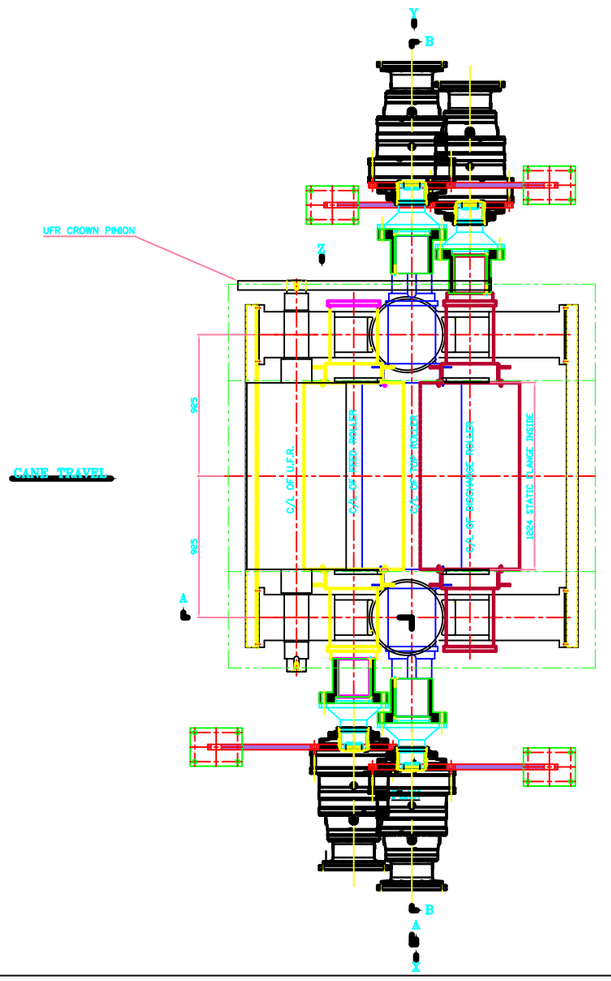

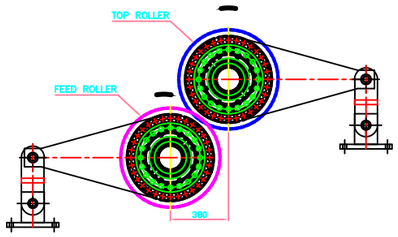

VIEW-X



VIEW-Y

1) SAND FILLING TO BE DONE BEFORE FULL GROUTING.
2) FULL GROUTING TO BE DONE AFTER FINAL ALIGNMENT OF HEAD STOCK AND FITMENT OF END PIECE AND JUICE GUTTER.
3) ALL GUM METAL TO BE BULE MATCHED WITH RESPECTIVE ROLLERS (90%)

THIS DESIGN AND DRAWING IS THE PROPERTY OF PRECISION ENGINEER AND SHALL NOT BE COPIED OR DISCLOSED TO A THIRD PARTY OR REPRODUCED OR USED FOR ANY PURPOSE WITHOUT OUR PERMISSION IN WRITING.

REV.NO.	DESCRIPTION	DRN. BY	CHD. BY	DATE
	REVISION			

CLIENT. PRECISION ENGINEER

	NAME	DATE
DRN.		
CHD.		
CHD.		
APPD.		

SCALE

TITLE. ASSEMBLY OF ø24"X48" MILL

AMEY ENGINEERS
S-30, BADRIDHAM INDUSTRIAL COMPLEX, PUNDAL, SECTOR-10, NEAR, KADAMBA- GIRDHAR, DIST.-PUNE,
PHONE-09890080870, EMAIL- engineers.amey@gmail.com

DRG. NO. AE/A1/772

DO NOT SCALE